



Customer		
Customer Address	Delivery Address (if different)	Page of
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTER FRAME

006.1900 (1 Slider#)139mm

006.1901 (2 Sliders) 139mm

EXTRUSION COLOUR

External	Finish
Internal	Finish
White Gloss <input type="checkbox"/>	
Grey Matt (7016M) <input type="checkbox"/>	
Black Matt (9005M) <input type="checkbox"/>	

WIND LOADING **MINIMUM 800PA**

Post Code	Altitude (metres)
Distance to Sea (Km)	
Exposed Location?	
Installation Height (metres)	
PA	lx

INTERLOCKS

Slim 50mm (006.2230) *

Slim 65mm (006.1987) *

Standard 94mm (006.1986)

REINFORCING (50mm only)

0090/0091 In (30mm only)

Out (30mm only)

Both Sides (60mm)


0092/0093 In (50mm only)

Out (50mm only)

Both Sides (100mm)

ITEM DETAILS

Item	Qty
Location	
Width	
Height	
Assembled <input type="checkbox"/>	Kit Form <input checked="" type="checkbox"/>

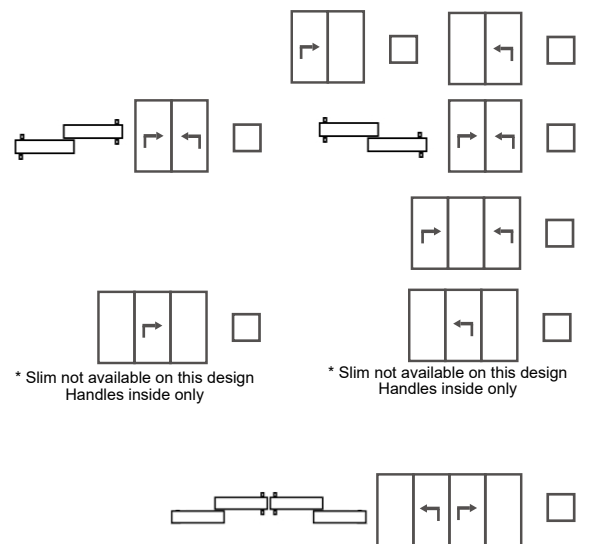

#This design uses 006.1900 Outerframe
 * Meeting stile = Standard 94mm Sashes
 Handles both sides, dependant on windloading (MAX ixx48).
 If 030.1099 reinforcing required, then locking is internal only.

REINFORCING (65mm & 94mm)

3097/1096 In (37mm)

Out (37mm)

Both Sides (74mm)

3099/1097 In (60mm)

Out (60mm)

Both Sides (120mm)

3099/1098 In (60mm)

Out (60mm)

Both Sides (120mm)

39mm ADD ONS (015.0183)

Head

Cill

Left

Right

Trickle Vents?

FIXING LUGS (056.6020)

THRESHOLD

(Supplied as standard)

DO NOT FIX THROUGH THE THRESHOLD

CILL PRESSING

DO NOT FIX THROUGH THE THRESHOLD

RP110 100 x 36

UTL036 60 x 40

UTL035 50 x 30

CILL

ETC458 190mm

Supplied with thermal break tape

No Cill / Pressing Required

HANDLE TYPE/COLOUR

White

Silver (painted RAL 7040)

Black

Anthracite Grey

PREMIUM HANDLE

Stainless Steel

GLAZING (28mm GLAZING STANDARD)

Planitherm Total + Argon, Thermobar Notes...

Unglazed 28mm Standard

Other

TERMS AND CONDITIONS

Overall sizes to include cills and add-ons (transom, mullion and midrail sizes are excluding cills and add-ons).
 Interlocks will be specified to meet windloading requirements, please see the attached data sheet for further details.
 Patio sashes slide on the inside as standard.
 All patios are faced drained and must meet a minimum barrier rating of 800PA.
 If reinforcing is required then it will be to the outside as standard.
 Patio outer frames exceeding 5000mm in width may require splitting. If not specified on the survey, we will split optimally.
 Maximum sloping pressing length is 3000mm. Anything exceeding this will be split with a butt strap.
 Maximum sash height is 2700mm, maximum sash width is 2700mm but must not exceed 300kg.
 All sizes should be referred to in millimetres.
 On dual colour orders with white inside, the inside of the patio and the inside of the cill may have a slight variance in colour.
 Full terms and conditions can be found on our website www.a-w-s.co.uk