



Customer		
Customer Address	Delivery Address (if different)	Page _____ of _____
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTER FRAME

Triple Track (210mm)



INTERLOCKS

Standard 94mm (006.1986)

Slim not available on triple track

REINFORCING

3097/1096 Out (37mm)

3099/1097 Out (60mm)

3099/1098 Out (60mm)

EXTRUSION COLOUR


External	Finish
Internal	Finish
White Gloss <input type="checkbox"/>	
Grey Matt (7016M) <input type="checkbox"/>	
Black Matt (9005) <input type="checkbox"/>	

WIND LOADING MINIMUM 800PA

Post Code	Altitude (metres)
Distance to Sea (Km)	
Exposed Location?	
Installation Height (metres)	
PA	lx

ITEM DETAILS

Item	Qty
Location	
Width	
Height	
Assembled <input type="checkbox"/>	Kit Form <input checked="" type="checkbox"/> Doc Q <input type="checkbox"/>

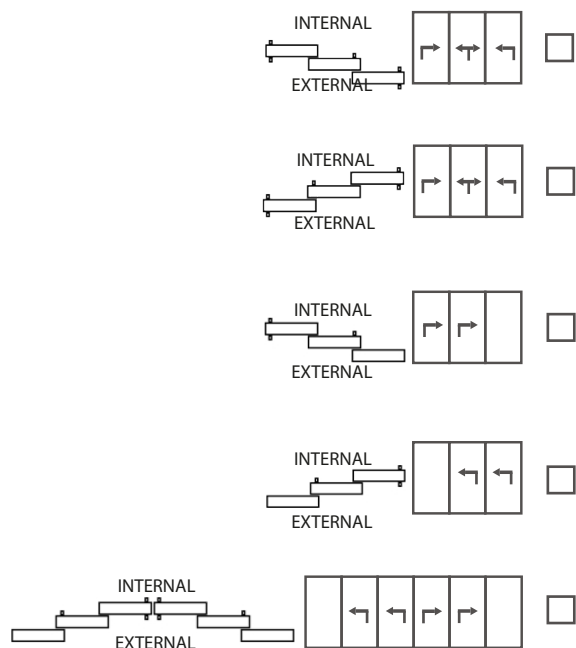

39mm ADD ONS (015.0183)

Head	<input type="checkbox"/>
Cill	<input type="checkbox"/>
Left	<input type="checkbox"/>
Right	<input type="checkbox"/>
Trickle Vents?	<input type="checkbox"/>

FIXING LUGS (056.6020)

THRESHOLD
 (Supplied as standard)
DO NOT FIX THROUGH THE THRESHOLD

NO CILL

NO CILL AVAILABLE

CILL PRESSING

DO NOT FIX THROUGH THE THRESHOLD

RP110 110 x 36 <input type="checkbox"/>	UTL036 60 x 40 <input type="checkbox"/>
	UTL035 50 x 30 <input type="checkbox"/>

No Cill/Pressing Required

HANDLE TYPE/COLOUR

White	<input type="checkbox"/>
Silver (painted RAL 7040)	<input type="checkbox"/>
Black	<input type="checkbox"/>
Anthracite Grey	<input type="checkbox"/>

PREMIUM HANDLE

Stainless Steel	<input type="checkbox"/>
-----------------	--------------------------

GLAZING

(28mm GLAZING STANDARD)

Planitherm Total + Argon, Thermobar Notes...

Unglazed 28mm Standard

Other

TERMS AND CONDITIONS

Overall sizes to include cills and add-ons (transom, mullion and midrail sizes are excluding cills and add-ons). Interlocks will be specified to meet windloading requirements, please see the attached data sheet for further details. Patio sashes slide on the inside as standard. All patios are faced drained and must meet a minimum barrier rating of 800PA. If reinforcing is required then it will be to the outside as standard. Patio outer frames exceeding 5000mm in width may require splitting. If not specified on the survey, we will split optimally. Maximum sloping pressing length is 3000mm. Anything exceeding this will be split with a butt strap. Maximum sash height is 2700mm, maximum sash width is 2700mm but must not exceed 300kg. All sizes should be referred to in millimetres. On dual colour orders with white inside, the inside of the patio and the inside of the cill may have a slight variance in colour. Full terms and conditions can be found on our website www.a-w-s.co.uk