



Customer		
Customer Address	Delivery Address (if different)	Page _____ of _____
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTERFRAME

INT210

No threshold available - 6mm clearance at bottom of door sash

BOTTOM RAIL

INT274 (51mm)

INT275 (150mm)

TRANSOM

INT230 (33mm)

DUMMY TRANSOM

INT230 (33mm)

BEAD

INT270 (Square)

DOOR

INT220

MASTER

Left Right

LOCKING

Latch only

Latch and Lock

└ Key Both Sides

└ Bathroom lock

Lock will have round escutcheon, colour match to handle.
Latch (and lock if required) and handle on Master sash only, Fingerbolts on Slave sash.

HANDLE TYPE/COLOUR

Philadelphia Verdun

Matt Black

Chrome

Antique Brass

Satin Chrome

PREMIUM HANDLE/COLOUR

Velino

Matt Black

Satin Nickel

Antique Brass

Bronze

Polished Nickel

Satin Brass

HINGE

White Black

GLAZING

Glazed (Single 6mm Tough)

Unglazed

ITEM DETAILS

Item	Qty
Width	
Height	
Location	

EXTRUSION COLOUR


White Gloss (SA018E)

Grey Matt (RAL 7016) Other colour: _____

Black Matt (RAL 9005) Dual colour not available

Finish _____

Customer Signature _____

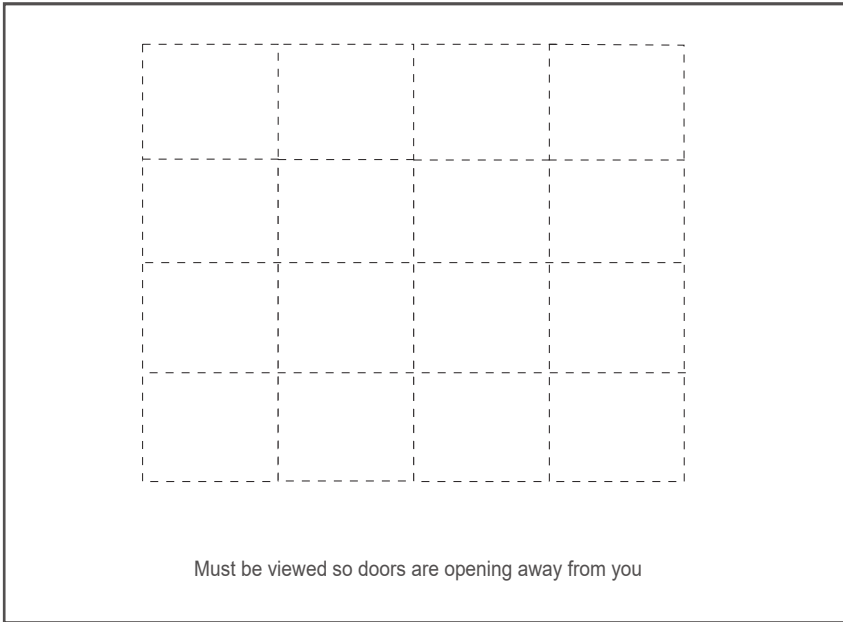

Items are min:
500 PA

*Subject to type of application.
Domestic - 500PA
Offices - 1000PA
Retail - 1500PA

Width Splits

As indicated on drawing

Equal mullions

Equal glass widths

Height Splits

Equal glass in door sash
Side panels to line through

Equal transom in doors
Side panels to line through

ADD ON

INT252 - 20mm

Left

Right

Top

Bottom

BAY POSTS

INT280 135°

INT281 90°

Notes:

Extra Info

- Lock Pocket on Master sash only
- ALL DOORS OPEN IN
- MINIMUM sash width: 400mm
- MAXIMUM sash width: 900mm
- MAXIMUM sash height: 2200mm
- French Doors will have a Lever/Lever handle on Master Door & Fingerbolts on the Slave.
- Splits are to the centre of the coupler
- All orders are subject to our terms and conditions of sale which are available at: www.a-w-s.co.uk

SIDEFRAME/TOPLIGHT AND FIXED SCREENS

Outerframe

INT210

Transom

INT232 (33mm)

Coupler

Horizontal

INT256 (6x35mm)

INT257 (Concealed)

INT356 (6x70mm)

INT255 (6x100mm)

Vertical (less than 1400*)

INT256 (6x35mm)

INT257 (Concealed)

Vertical (greater than 1400*)

INT356 (6x70mm)

INT255 (6x100mm)

* Approx height - Dependant on vertical splits. Required coupler to be calculated based on 800PA. (see max lxx values in manual)

Note, coupled frames need to be bolted together from alternate sides (approx 400mm apart)