



|                  |                                 |               |
|------------------|---------------------------------|---------------|
| Customer         |                                 |               |
| Customer Address | Delivery Address (if different) | Page of       |
|                  |                                 | Goods         |
|                  |                                 | VAT           |
|                  |                                 | Total         |
| Contact          | Delivery Method                 | Order Date    |
| Tel              | Despatch Route                  | Delivery Date |
| Fax              | Customer Ref                    |               |
| Email            | Sales Contact                   |               |

**OUTSIDE VIEW ONLY**

**LIST CODE**

**OUTER FRAME**

**VG512 Standard (165mm)**

**Cill**

- None
- 205mm (IN057+IN057)
- 255mm (IN157+IN057)
- 300mm (ETC478)
- Drainage(VG556/VG557)

**Add-on**

- 42mm (VG559)
- Head
- Cill
- Left
- Right

Trickle Vents?

**VG513N Upstand (182mm)**

**Cill**

- None
- 205mm (IN057+IN057)
- 255mm (IN157+IN057)
- 300mm (ETC478)

**Add-on**

- 42mm (VG573)
- Head
- Cill
- Left
- Right

Trickle Vents?

**INTERLOCKS**

**Standard 83mm**

- VG532 Reinforced In
- VG532 Reinforced Out

**Slim 35mm**

- VG534/536 Standard
- VG539 Reinforced Out

**HANDLE TYPE/COLOUR**

**D Handle**

- Inside Only/Half Cylinder

**Lever Handle**

- Inside Only/Half Cylinder
- Inside Lever/Fingerpull Out
- No External Locking

**Colour**

- White
- Silver Anodised
- Black
- Grey

**PREMIUM HANDLES**

**Pole Handle (s/steel)**

- Both Sides
- Pole In/Fingerpull Out
- Half Cylinder Inside

**EXTRUSION COLOUR**

|  |               |
|--|---------------|
| <b>External</b>                                | <b>Finish</b> |
| <b>Internal</b>                                | <b>Finish</b> |
| White Gloss (SA018E) <input type="checkbox"/>  |               |
| Grey Matt (RAL 7016) <input type="checkbox"/>  |               |
| Black Matt (RAL 9005) <input type="checkbox"/> |               |


**WIND LOADING** **MINIMUM 800PA**

|                              |             |
|------------------------------|-------------|
| Post Code                    | Altitude(m) |
| Distance to sea (Km)         |             |
| Exposed Location?            |             |
| Installation Height (Metres) |             |
| PA                           | lx          |

**ITEM DETAILS**

|                                    |  |
|------------------------------------|--|
| <b>Item</b>                        | <b>Qty</b>   |
| <b>Location</b>                    |  |
| <b>Width</b>                       |  |
| <b>Height</b>                      |  |
| Assembled <input type="checkbox"/> | Kit Form <input type="checkbox"/> Doc Q <input type="checkbox"/> |

OVERALL SIZES TO INCLUDE CILLS & ADD-ON'S  
(TRANSOM, MULLION & MIDRAIL MEASUREMENTS ARE EXCLUDING CILLS AND ADD-ON'S)

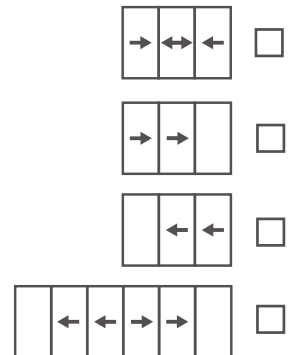

**GLAZING** (28mm GLAZING STANDARD)

Notes...

Planitherm Total + Argon, Thermobar  Unglazed  Other

**TERMS AND CONDITIONS / EXTRA INFO**

Interlocks will be specified to meet wind loading requirements, if reinforcing required, it will be to the outside as standard. Patio sashes slide on the inside as standard.

All patios are faced drained and must meet a minimum barrier rating of 800 PA

Patio widths over 3000mm will be made in kit form as standard.

Patio outer frames exceeding 6000mm in width will require splitting. If not specified on the survey, we will split optimally. Maximum sash height is 2500mm but must not exceed 250kg.

All sizes should be referred to in millimetres.

Glass units will be toughened as required for building regulations where necessary.

Doc Q comes glazed (Lami in/Tough Out) and a high security cylinder.

All orders are subject to our terms and conditions of sale which are available at: [www.a-w-s.co.uk](http://www.a-w-s.co.uk)