AFFORDABLE ALUMINIUM SYSTEMS LTD

ALLSTYLE ENTRANCE DOOR SURVEY

Customer		
Customer Address	Delivery Address (if different)	Page of
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTER FRAME
- SPD702 62mm ☐
- SPD701 78mm ☐

EXTERNAL COLOUR
- Door
- Frame

INTERNAL COLOUR
- Door
- Frame

WEATHER BAR
- White ☐ Silver ☐
- Black ☐ Match ☐

THRESHOLD
- Low SPD 703
  - Full width ☐
  - Std width ☐
- Outer Frame ☐

ITEM DETAILS

Item	Qty
Width	
Height	

- Location
- Door Type
- ALL DOORS ARE OPEN IN

CILL
- None ☐
- 150mm (ETC457) ☐
- 190mm (ETC458) ☐
- 225mm (ETC479) ☐

Use SPD750 infill with a cill

Overall sizes to include cills and add-ons (transom, mullion and midrail sizes are excluding cills and add-ons).
All couplers are deducted from frame and toplight

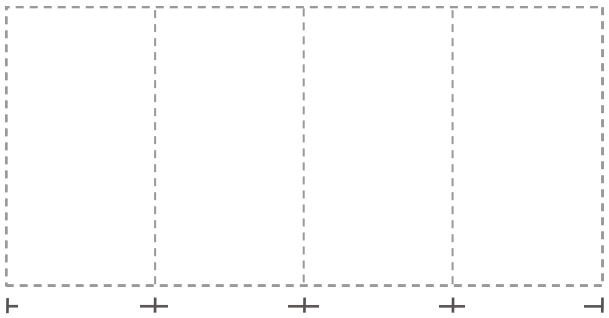

Door, toplight and side frames are fabricated seperately

Side Frame Fixed Only

Internally Glazed Option
ETC4011 (47mm Face) ☐
ETC4031 (Transom 62mm Face)
Midrail match not available

Externally Glazed Option
ETC4111 (Ext glazed) ☐

Transom/Mullion for ETC4110
- ETC4130 (57mm) ☐
- ETC639 (109mm) ☐

Opener - Alitherm 400
- ETC4111 Outer
- ETC4129 Int Glazed ☐
- ETC4120 Ext Glazed ☐

ADD-ON - 20mm
- Head ☐
- Locking Jamb ☐
- Hinge Jamb ☐

Add-on recommended down hinge side of SPD702 outer as there is only 10mm clearance on the hinge

HINGE COLOUR
- Black ☐
- White ☐
- To Match Door ☐
- To Match Frame ☐

LOCK
- ACPD681 10 Point Lock ☐
- ACPD670 Slam Lock ☐

Cylinder
- Key/Key ☐
- Key/Thumb ☐

Select from one section only

a - Escutcheon Fingerpull
- Both sides ☐ Out (Flush to inside) ☐
- S/Steel ☐
- Graphite ☐

or

b - Flush Mounted Escutcheon
- S/Steel ☐
- Chrome ☐

LETTERPLATE
- Yes ☐
- Colour.....
- Code.....
- Position.....

EXTRA HARDWARE

.....

Note to sales, please check compatibilty of sizes / locks / outer using online Door Designer, especially with SPD701.

NOTES

For installation guidance please visit:
https://www.smartsystems.co.uk/installdesignerdoors

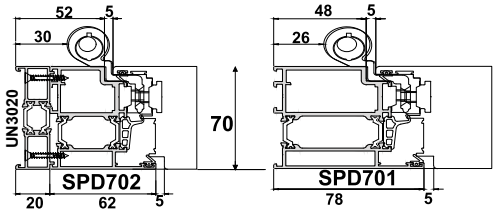

Coupler (Vertical)
- UN3015 (70 x 15mm) ☐
- ETC357 (76 x 25mm) ☐
- Load Bearing (24mm) inc Bay Jacks ☐

UN3015 coupler will be used unless ixx value required is too great.

Coupler (Horizontal Drained)
- UN3000 (70 x 15mm) ☐

GLAZING - DOOR (TRIPLE GLAZED)

Planitherm Total+ Argon, Toughened
Diffused Lami as standard(middle pane)
- Clear (not available on all doors) ☐

GLAZING - SIDE PANEL/TOPLIGHT

Clear Double Glazed as standard
Planitherm Total+ Argon, Toughened
- Triple Glazed ☐
- Diffused Laminate ☐
- Satin ☐
- Unglazed ☐

Double glazed will be satin/dif lam to outside
Triple will be satin/dif lam to middle pane

EXTERNAL HANDLE
- None ☐
- As Below ☐

.....

INTERNAL HANDLE
- None ☐
- As Below ☐

.....

TERMS AND CONDITIONS

Allstyle Doors are inspected and photographed before being packaged
The packaging has a “Shock Dot” - if a colour is visible, do not accept delivery and notify your sales contact immediately.
The door MUST be inspected on, or as soon after, delivery as possible. Any damage must be reported within 36 hours of delivery, accompanied by photographic or video evidence.
If there is any damage DO NOT install the door.
Once the order has been placed, alterations will not be possible. Please check the order requirements carefully.
Full terms and conditions can be found on our website www.a-w-s.co.uk.

© AAS AED JAN26