



Customer

Customer Address	Delivery Address (if different)	Page of
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

Variant
Slide Only
Lift & Slide (middle sashes slide only)

ITEM DETAILS	
Item	Qty
Location	
Width	
Height	
Fully Assembled <input type="checkbox"/> Kit Form <input type="checkbox"/>	

EXTRUSION COLOUR	
External	Finish
Internal	Finish
White Gloss (9016G)	<input type="checkbox"/>
Grey Matt (7016M)	<input type="checkbox"/>
Black Matt (9005M)	<input type="checkbox"/>

GLAZING (28mm only available)

Planitherm Total + Argon, Thermobar Unglazed Other (specify in notes)

OUTER FRAME	
TH 8022 (183mm)	<input type="checkbox"/>

INTERLOCKS	
25mm (80402)	<input type="checkbox"/>

25mm (80402)	
50mm (80411)	<input type="checkbox"/>

REINFORCING	
Reinforcing Requirements based on windloading info	

Supplied prepped and loose

TV 12603	In (25mm x 78mm)	<input type="checkbox"/>
	Out (25mm x 78mm)	<input type="checkbox"/>
	Both Sides	<input type="checkbox"/>
	Steel Insert	<input type="checkbox"/>

TV 00628	In (40mm x 58mm)	<input type="checkbox"/>
	Out (40mm x 58mm)	<input type="checkbox"/>
	Both Sides	<input type="checkbox"/>

ADD ON'S - 35mm (80616)	
Head	<input type="checkbox"/>

Cill	<input type="checkbox"/>
Left	<input type="checkbox"/>

Right	<input type="checkbox"/>
Trickle Vents	<input type="checkbox"/>


CILL	
None	<input type="checkbox"/>

TH 80106 230mm	<input type="checkbox"/>
----------------	--------------------------

HANDLE TYPE - Slide Only	
D Handles	

In & Out (Locking In & Out)	<input type="checkbox"/>
Inside Only (No External Locking)	<input type="checkbox"/>

EXTERNAL VIEW ONLY - OVERALL SIZES TO INCLUDE CILLS & ADD-ON'S

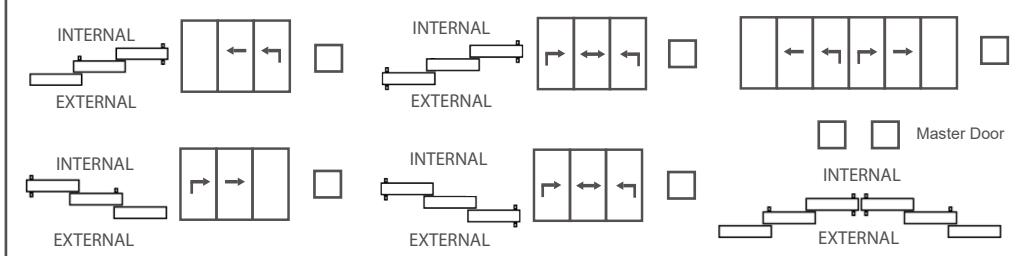

NOTES

HANDLE TYPE - Lift & Slide	
Lever Handles	

In & Out (Locking In & Out)	<input type="checkbox"/>
Inside Only (No External Locking)	<input type="checkbox"/>

Inside Lever/Fingerpull Out (No External Locking)	<input type="checkbox"/>
---	--------------------------

HANDLE COLOUR (for standard)	
White	<input type="checkbox"/>

Black	<input type="checkbox"/>
-------	--------------------------

Polished Gold	<input type="checkbox"/>
---------------	--------------------------

Polished Chrome	<input type="checkbox"/>
-----------------	--------------------------

Smokey Chrome	<input type="checkbox"/>
---------------	--------------------------

Smooth Satin Chrome	<input type="checkbox"/>
---------------------	--------------------------

PREMIUM HANDLES	
Satin Stainless Steel	<input type="checkbox"/>

Black Stainless Steel	<input type="checkbox"/>
-----------------------	--------------------------

TERMS AND CONDITIONS / EXTRA INFO	
<ul style="list-style-type: none"> Interlocks will be specified to meet windloading requirements, if reinforcing is required then it will be to the outside as standard. Patio sashes slide on the inside as standard. Unless specifically requested otherwise all sliding doors will be supplied to meet a wind load of 0.08N/cm² (130km/h). Where reinforcement profiles are supplied, these must be screwed to the interlock profile with screws spaced no more than 200mm apart. Patio outer frames exceeding 5800mm in width will require splitting. If not specified on the survey, we will split optimally. Maximum sash height is 2700mm, maximum sash width is 2500mm but must not exceed 300kg. Patios over 4000mm wide or 2400mm high will be made in kit form as standard. All sizes should be referred to in millimetres. 	<p>All orders are subject to our terms and conditions of sale which are available at: www.a-w-s.co.uk</p> <p>© AAS JAN26 ALUNET</p>