



Customer

Customer Address	Delivery Address (if different)	Page of
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTER FRAME

VG512 Standard (165mm)

- Cill
 - None
 - 205mm (IN057+IN057)
 - 255mm (IN157+IN057)
 - 300mm (ETC478 Max 5m)
 - Drainage(VG556/VG557)
- Add-on
 - 42mm (VG559)
 - Head
 - Cill
 - Left
 - Right
- Trickle Vents?

EXTRUSION COLOUR

External	Finish
Internal	Finish
White Gloss (SA018E) <input type="checkbox"/>	
Grey Matt (RAL 7016) <input type="checkbox"/>	
Black Matt (RAL 9005) <input type="checkbox"/>	

WIND LOADING

MINIMUM 800PA

Post Code	Altitude(m)
Distance to sea (Km)	
Exposed Location?	
Installation Height (Metres)	
PA	Ix


VG513N Upstand (182mm)

- Cill
 - None
 - 205mm (IN057+IN057)
 - 255mm (IN157+IN057)
 - 300mm (ETC478 Max 5m)
- Add-on
 - 42mm (VG573)
 - Head
 - Cill
 - Left
 - Right
- Trickle Vents?

ITEM DETAILS

Item	Qty
Location	
Width	
Height	
Assembled <input type="checkbox"/>	Kit Form <input type="checkbox"/>
Doc Q <input type="checkbox"/> Order in per job	

OVERALL SIZES TO INCLUDE CILLS & ADD-ON'S
(TRANSOM, MULLION & MIDRAIL MEASUREMENTS ARE
EXCLUDING CILLS AND ADD-ON'S)

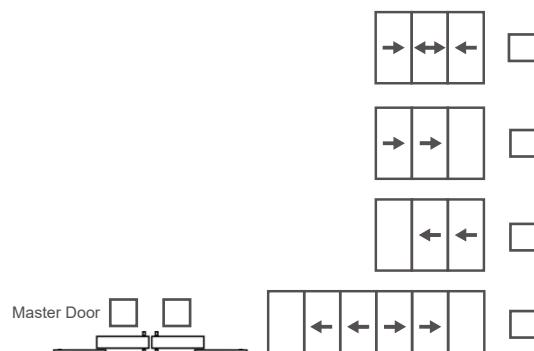

INTERLOCKS

Standard 83mm

- VG532 Reinforced In
- VG532 Reinforced Out

Slim 35mm

- VG534/536 Standard
- VG539 Reinforced Out

GLAZING

(28mm GLAZING STANDARD)

Notes...

Planitherm Total + Argon, Thermobar Unglazed Other

HANDLE TYPE/COLOUR

D Handle

- Inside Only/Half Cylinder

Lever Handle

- Inside Only/Half Cylinder
- Inside Lever/Fingerpull Out

Colour

- White
- Silver Anodised
- Black
- Grey

TERMS AND CONDITIONS / EXTRA INFO

Interlocks will be specified to meet wind loading requirements, if reinforcing required, it will be to the outside as standard. Patio sashes slide on the inside as standard.

All patios are faced drained and must meet a minimum barrier rating of 800 PA

Patio widths over 3000mm will be made in kit form as standard.

Patio outer frames exceeding 6000mm in width will require splitting. If not specified on the survey, we will split optimally.

Maximum sash height is 2500mm but must not exceed 250kg.

All sizes should be referred to in millimetres.

Glass units will be toughened as required for building regulations where necessary.

Doc Q comes glazed (Lami in/Tough Out) and a high security cylinder.

All orders are subject to our terms and conditions of sale which are available at: www.a-w-s.co.uk

PREMIUM HANDLES

Pole Handle (s/steel)

- Both Sides

Pole In/Fingerpull Out

- Half Cylinder Inside