

Customer		
Customer Address	Delivery Address (if different)	Page _____ of _____
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTER FRAME

VG5011 Upstand (113mm)

- VG584 - 12mm drainage tray
- No Cill
- Cill (25mm)
- ETC458 190mm Cill
- ETC479 225mm Cill
- Cill Pressing (3mm)
- RP110 110 x 36
- UTL036 60 x 40
- UTL035 50 x 30

INTERLOCKS
Reinforcing Requirements based on 800pa

Standard 99mm

- VG532 Reinforced In
- VG532 Reinforced Out

Reinforcement Supplied prepped and loose

Slim 35mm

- VG534/536 Standard
- VG539 Reinforced Out

Ixx Windload =

ADD-ONS

42mm (VG572)


- Head
- Cill
- Left
- Right
- Trickle Vents?

ITEM DETAILS

Item	Qty
Location	
Width	
Height	
Assembled <input type="checkbox"/>	Kit Form <input type="checkbox"/>

EXTRUSION COLOUR

External	Finish
Internal	Finish
White Gloss (SA018E) <input type="checkbox"/>	
Grey Matt (RAL 7016) <input type="checkbox"/>	
Black Matt (RAL 9005) <input type="checkbox"/>	

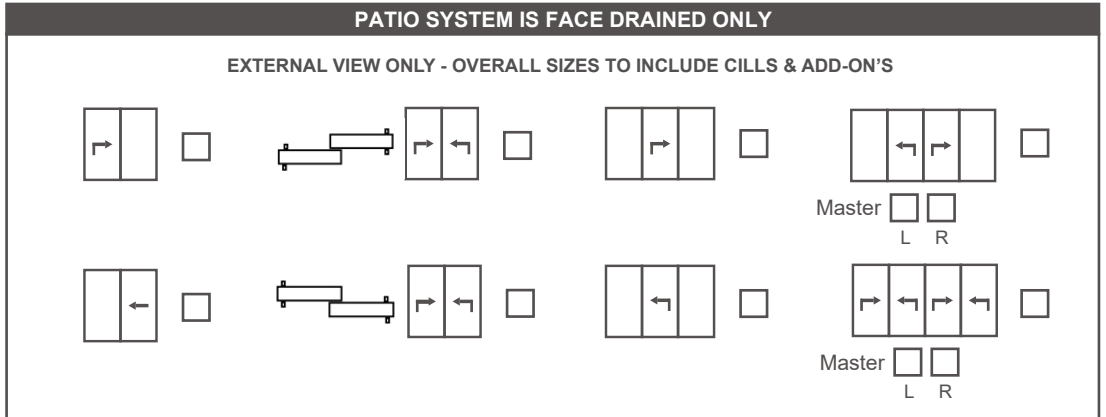

GLAZING (28mm GLAZING STANDARD)

Planitherm Total + Argon, Thermobar Unglazed Other (specify in notes)

NOTS

STANDARD LIFT & SLIDE HANDLE OPTION

Lever Handle

- Inside Only/Half Cylinder
- Inside Only/Fingerpull out (No External Locking)

Colour

- White
- Silver (painted 7040)
- Black
- Grey

PREMIUM LIFT & SLIDE HANDLE OPTION

304 Stainless Steel Lever Handle

- Inside Only/Half Cylinder
- Inside Only/Fingerpull out (No External Locking)

Colour

- Satin Steel
- Polished Steel
- PVD Gold

TERMS AND CONDITIONS / EXTRA INFO

Patio sashes slide on the inside as standard.
 Unless specifically requested otherwise all sliding doors will be supplied to meet a wind load of 0.08N/cm² (130km/h).
 Patio widths over 3000mm wide and/or 2400mm tall will be supplied in kit form as standard.
 Patios exceeding 6000mm in width will require splitting. If not specified on the survey, we will split optimally.
 Maximum sash height is 2500mm and sash width is 3235mm but must not exceed 400kg.
 Glass units will be toughened as required for building regulations where necessary.
 For Doc Q please specify upgraded glazed (Lami in/Tough Out) and a high security cylinder.

All orders are subject to our terms and conditions of sale which are available at: www.a-w-s.co.uk

© AAS April 26 VG+TTLS