PLEASE CHECK CAREFULLY, ONCE SIGNED OFF WE ARE UNABLE TO ACCEPT AMENDMENTS

AFFORDABLE ALUMINIUM SYSTEMS LTD — VG+ UPGRADE TRIPLE TRACK SURVEY

Customer		
Customer Address	Delivery Address (if different)	Page of
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY

LIST CODE

OUTER FRAME

VG5013 Upstand (184mm)
- with VG584 - 12mm drainage tray

- **No Cill** ☐
- **Cill (25mm)** ☐
  ETC478 300mm Cill
- **Cill Pressing (3mm)**
  - RP110 110 x 36 ☐
  - UTL036 60 x 40 ☐
  - UTL035 50 x 30 ☐

INTERLOCKS

Reinforcing Requirements based on 800pa

Standard 83mm ☐
- VG532 Reinforced In ☐
- VG532 Reinforced Out ☐

Reinforcement Supplied prepped and loose

Slim 35mm ☐
- VG534/536 Standard
- VG539 Reinforced Out ☐

Ixx wind load =

ADD-ONS

42mm (VG573) ☐
- Head ☐
- Cill ☐
- Left ☐
- Right ☐

Trickle Vents? ☐

ITEM DETAILS

Item	Qty
Location	
Width	
Height	
Assembled ☐	Kit Form ☐

EXTRUSION COLOUR

External	Finish
Internal	Finish
White Gloss (SA018E) ☐	
Grey Matt (RAL 7016) ☐	
Black Matt (RAL 9005) ☐	

PATIO SYSTEM IS FACE DRAINED ONLY

EXTERNAL VIEW ONLY - OVERALL SIZES TO INCLUDE CILLS & ADD-ON'S

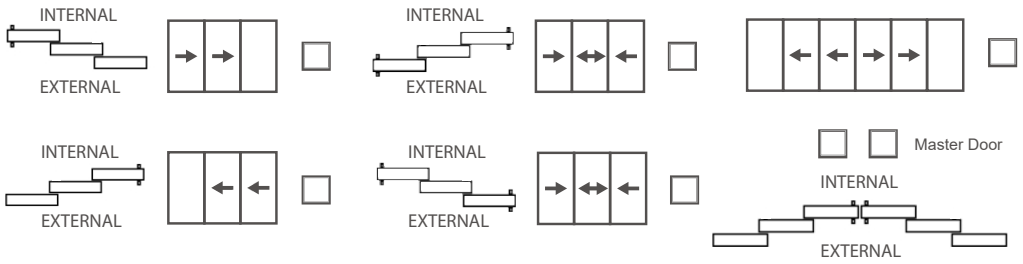

GLAZING (28mm GLAZING STANDARD)

Planitherm Total + Argon, Thermobar ☐ Unglazed ☐ Other (specify in notes) ☐

NOTES

STANDARD HANDLE W/ SHOOTBOLT LOCK

Cranked Lever Handle (Both Sides) ☐
- Inside Only/Half Cylinder ☐
- Inside Lever/Fingerpull Out (No External Locking) ☐

Colour
- White ☐
- Black ☐
- Grey ☐
- Silver Painted ☐

ALTERNATIVE OPTIONS WITH MULITPOINT LOCKING

D Handle ☐
- Inside Only/Half Cylinder ☐

Lever Handle ☐
- Inside Only/Half Cylinder ☐
- Inside Only/Fingerpull out ☐
  No External Locking

Pole Handle (S.Steel) ☐
- Both Sides ☐
- Pole In/ Fingerpull out ☐

Colour
- White ☐
- Silver Anodised ☐
- Black ☐
- Grey ☐

Colour
- Satin Steel ☐
- PVD Black ☐

TERMS AND CONDITIONS / EXTRA INFO

Patio sashes slide on the inside as standard.
Unless specifically requested otherwise all sliding doors will be supplied to meet a wind load of 0.08N/cm2 (130km/h).
Patio widths over 3000mm wide and/or 2400mm tall will be supplied in kit form as standard.
Patios exceeding 6000mm in width will require splitting. If not specified on the survey, we will split optimally.
Maximum sash height is 2500mm but must not exceed 250kg.
Glass units will be toughened as required for building regulations where necessary.
For Doc Q please specify upgraded glazed (Lami in/Tough Out) and a high security cylinder.

All orders are subject to our terms and conditions of sale which are available at: www.a-w-s.co.uk

© AAS April 26 VG+TT